


C32 GUIDING BOOK



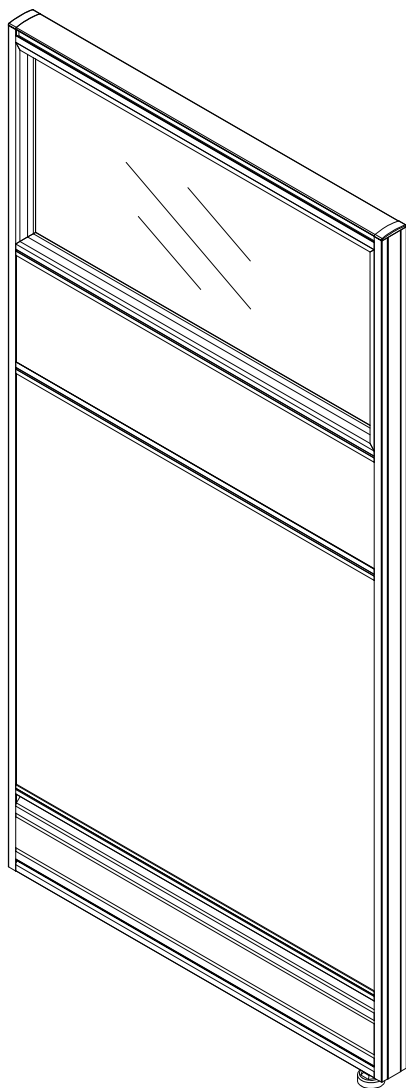

MENU of C32 PANEL


1.General design character	1
2.Structure	2
3.Connections	5
4.Supportings hanging accessories	6
5.Components list	8
6.Segments details	10
7.Cut length logic	15
8.Holes punching	17

I.C32 details:



1.aluminum frame, block system partition

2.C32 thickness:32mm

II.END TRIM




III.Corner connections




I.C32 Structure details:

1.Panel-base system, aluminum frame includes powder coated and anodized.

2.Block material:(4mm)glass/polycarbonate,melamine, fabric,metal sheet, white board and accessories rail.

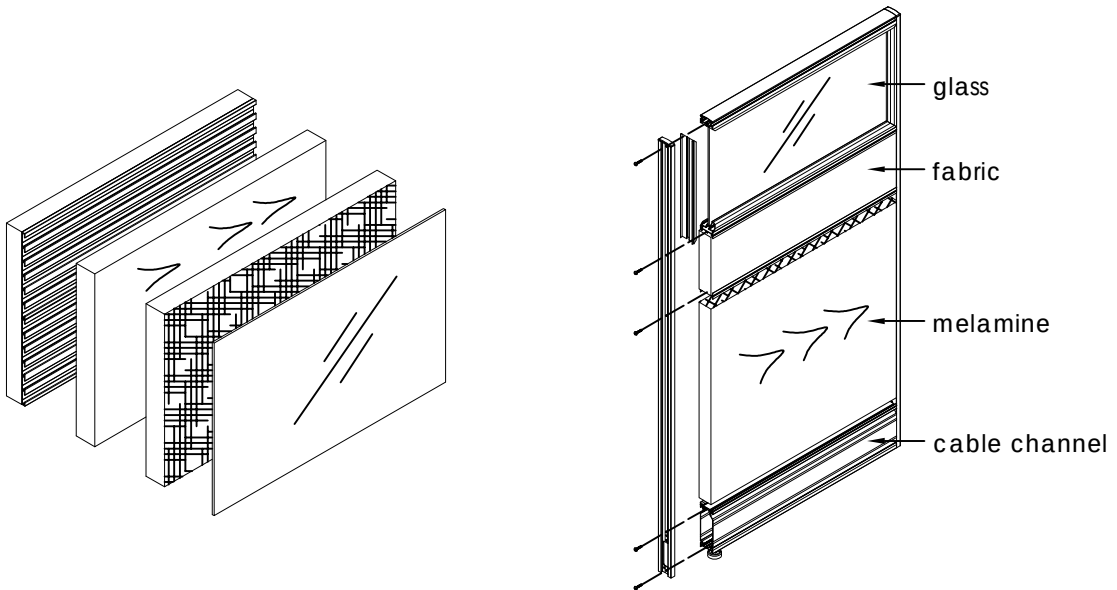


3.C32 cable channel (wire): three options.

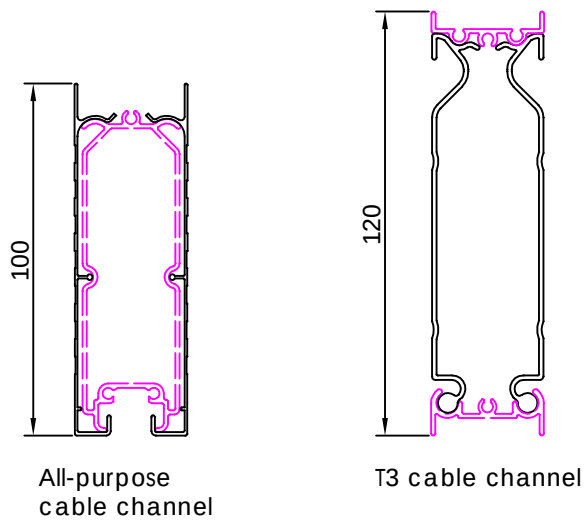


II.Capacity of cable channel

C32

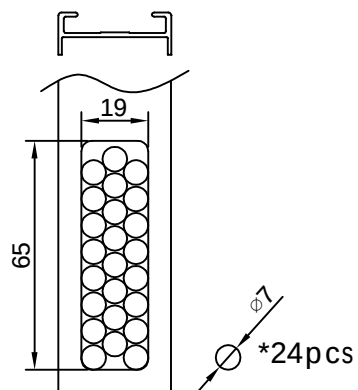


All-puepose cable channel
& T3-120 cable channel


III.C32 Panel explosion details

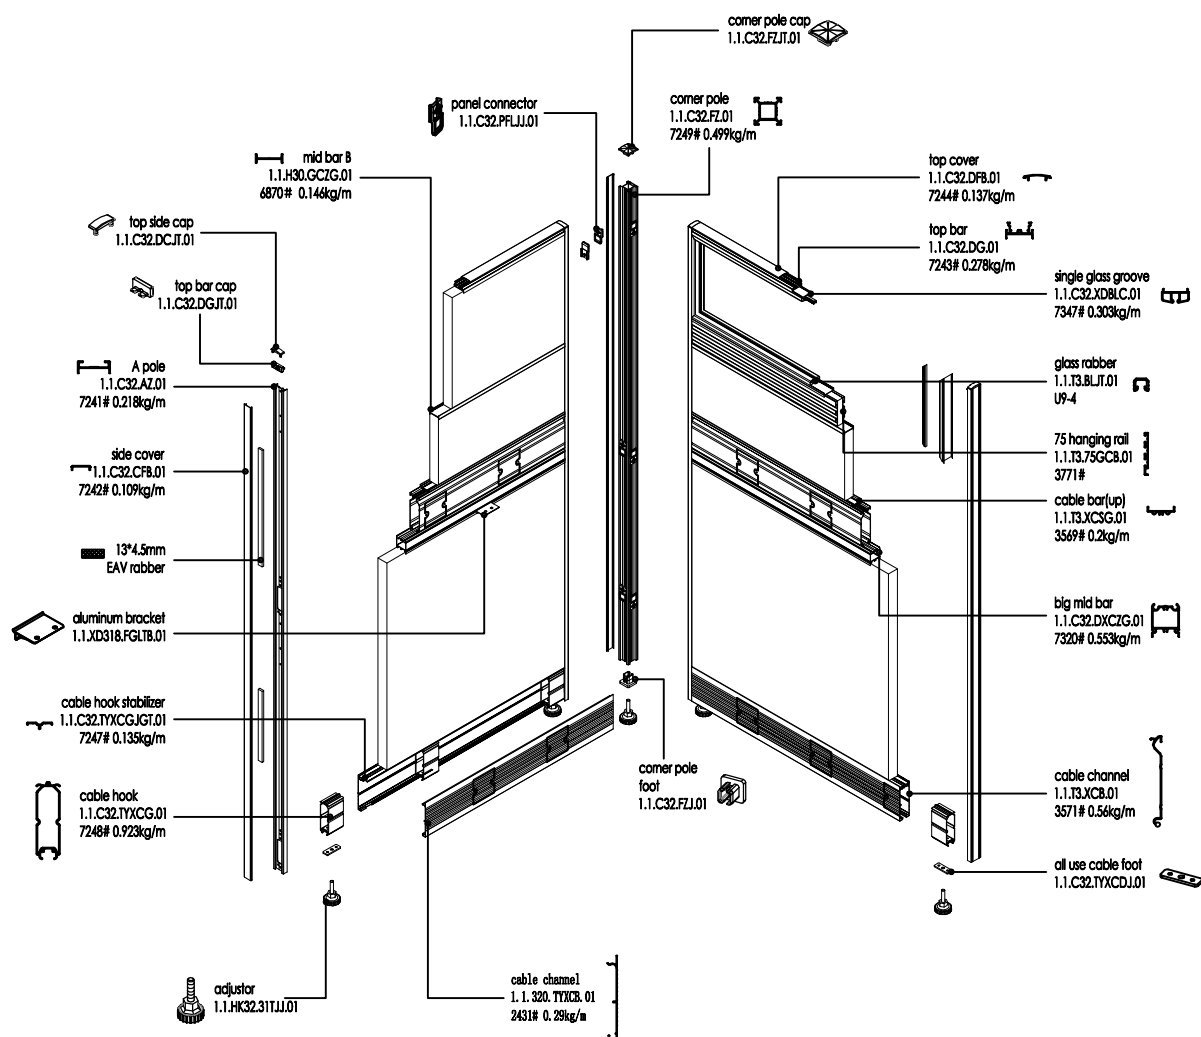


I.C32 between panels and poles

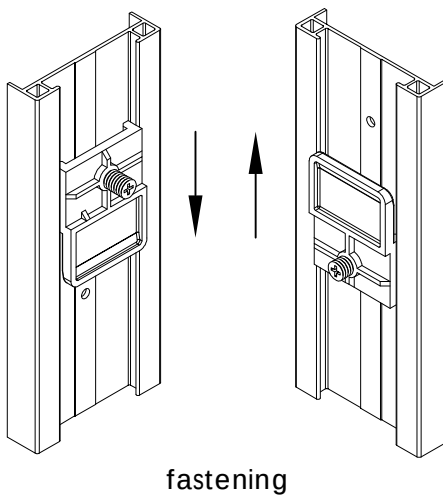


II.Different thickness connections(take L shape for example)

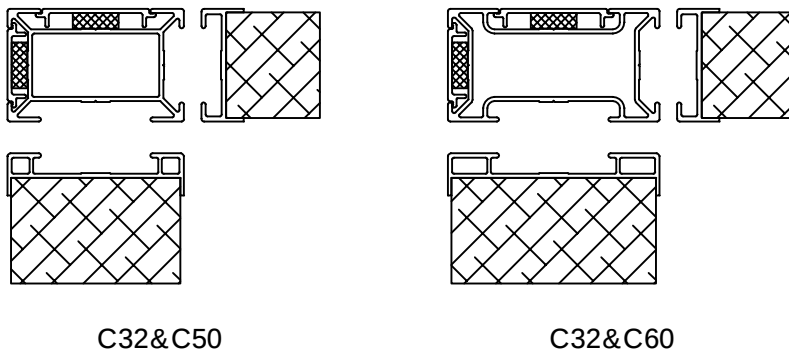


L shape workstation for example

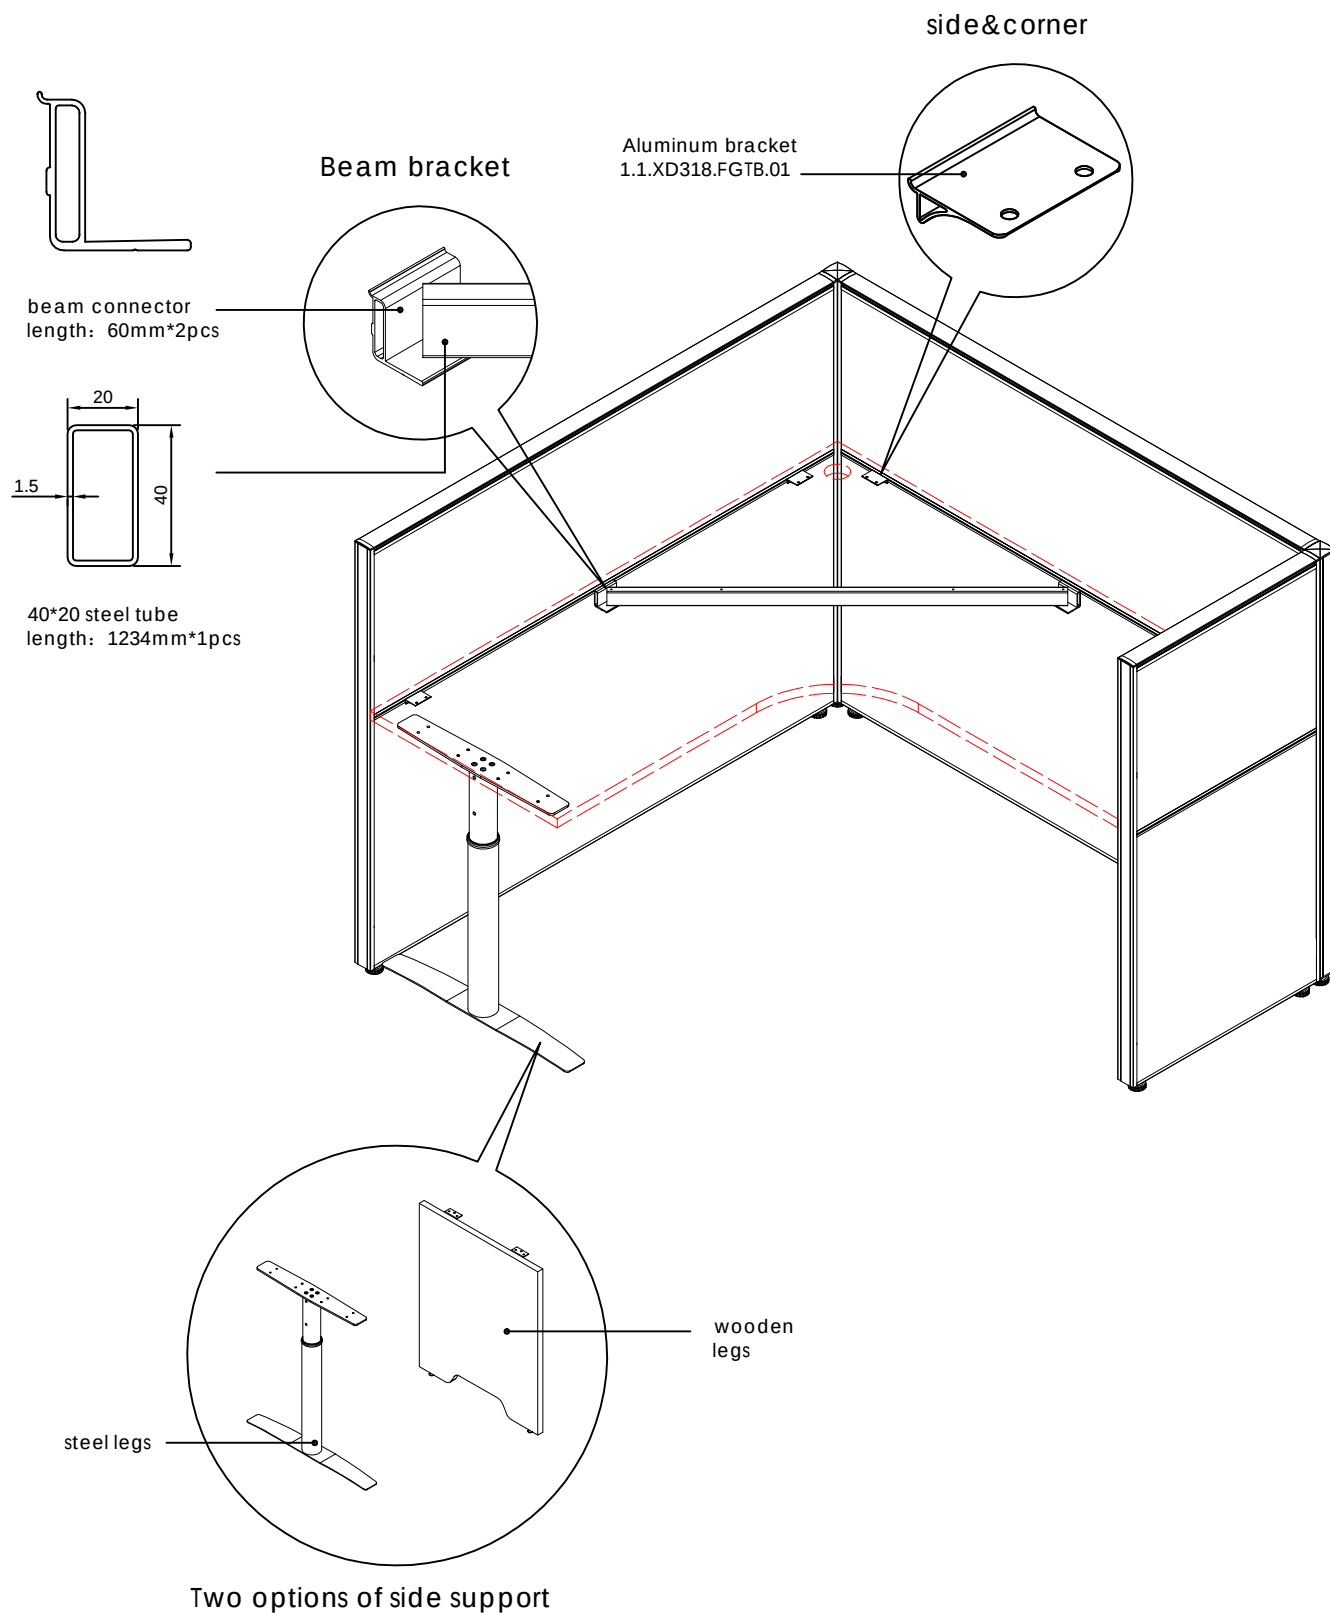

C 32 Hanings system

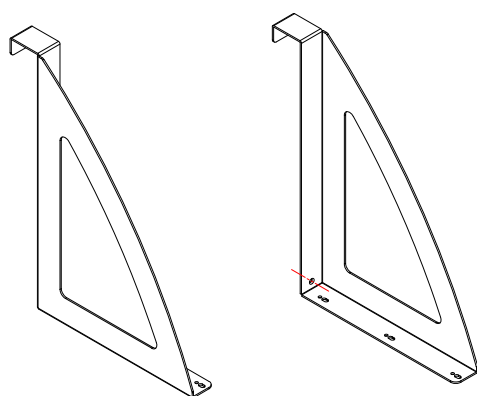


Overhead cabinet bracket(Left / right)




75 hanging rail
1.1.T3.75G C B.01
3771#

Hanging accessories

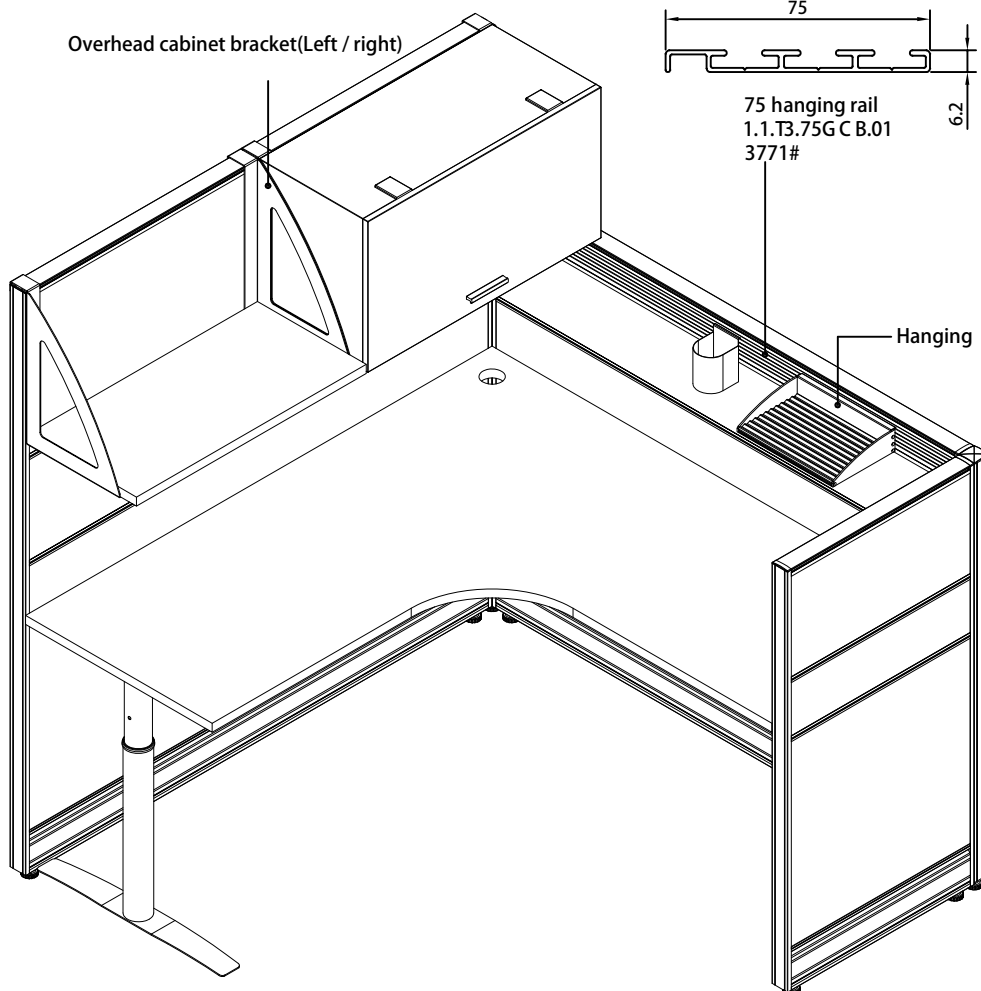

C32 Components list

I.C32 Aluminum profiles parts



A pole
1.1.C32.AZ.01
7241# 0.218kg/m




side cover
1.1.C32.CFB.01
7242# 0.109kg/m




top cover
1.1.C32.DFB.01
7244# 0.137kg/m



top bar
1.1.C32.DG.01
7243# 0.278kg/m




mid bar A
1.1.C32.FGZG.01
6772# 0.244kg/m




corner pole
1.1.C32.FZ.01
7249# 0.499kg/m




single glass groove
1.1.C32.XDBLC.01
7347# 0.303kg/m




double glass groove
1.1.C32.XSBLC.01
7348# 0.293kg/m



big mid bar
1.1.C32.DXCZG.01
7320# 0.553kg/m




1.1.C32.DMFGHGLJJ.01
7319# 0.728kg/m




cable bar(down)
1.1.C32.XCXG.01
7246# 0.24kg/m



cable hook stabilizer
1.1.C32.TYXCGJGT.01
7247# 0.135kg/m




T3 cable bar(up)
1.1.T3.XCSG.01
3569# 0.2kg/m



mid bar B
1.1.H30.GCZG.01
6870# 0.146kg/m




Top Cover Power Coating
1.1.C32.DFBPT.01
7412# 0.144kg/m



cable hook
1.1.C32.TYXCG.01
7248# 0.923kg/m



cable channel
1.1.320.TYXCB.01
2431# 0.29kg/m



cable channel
1.1.T3.XCB.01
3571# 0.56kg/m




Double Glass Groove Power Coating
1.1.C32.XSBLCPF.01
7414# 0.303kg/m




Single Glass Groove Power Coating
1.1.C32.XDBLCPF.01
7413# 0.312kg/m

C32 Components list


II.C32 Accessories parts




top side cap
1.1.C32.DCJT.01



top bar cap
1.1.C32.DGJT.01




corner pole cap
1.1.C32.FZJT.01




corner pole foot
1.1.C32.FZJ.01




panel connector
1.1.C32.PFLJJ.01
(with M6*8 X screw)




cable connector
1.1.T3.XCBJT.01



single foot
1.1.C32.DLJ.01




all use cable foot
1.1.C32.TYXCDJ.01




13*4.5mm
EAV rubber




glass rubber
1.1.T3.BLJT.01
U9-4



adjustor
1.1.HK32.31TJJ.01




Aluminum bracket
1.1.XD318.FGLTB.01



BEAM BRACKET
1.1.C32.HGTBTJ.01


C32 segments details

I. Without cable channel

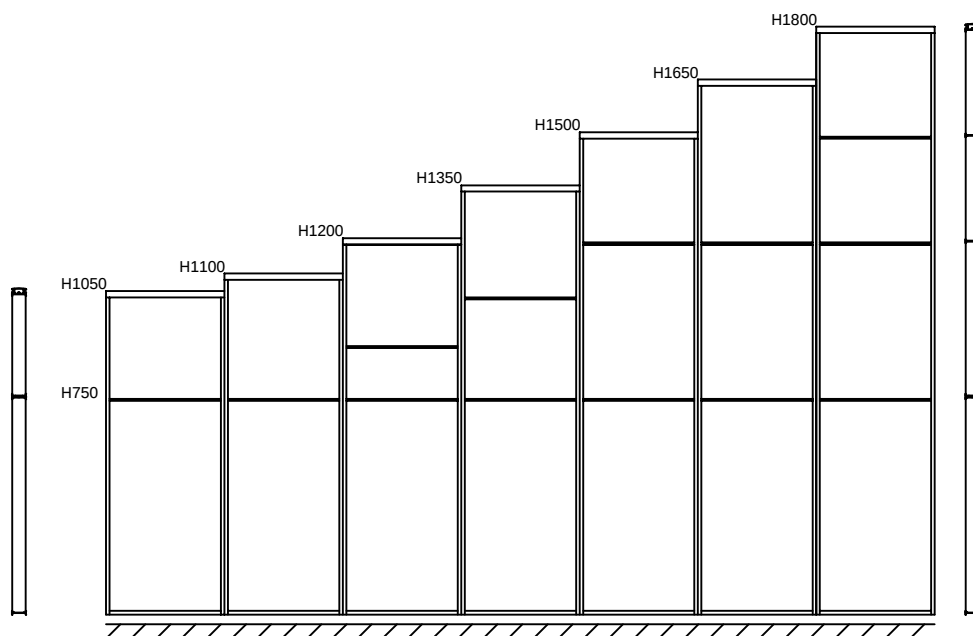


H: 1050、1100、1200、1350、1500、1650 and 1800mm.

W: 450、500、600、750、800、900、1050、1200、1400、1500、1600 and 1800mm.

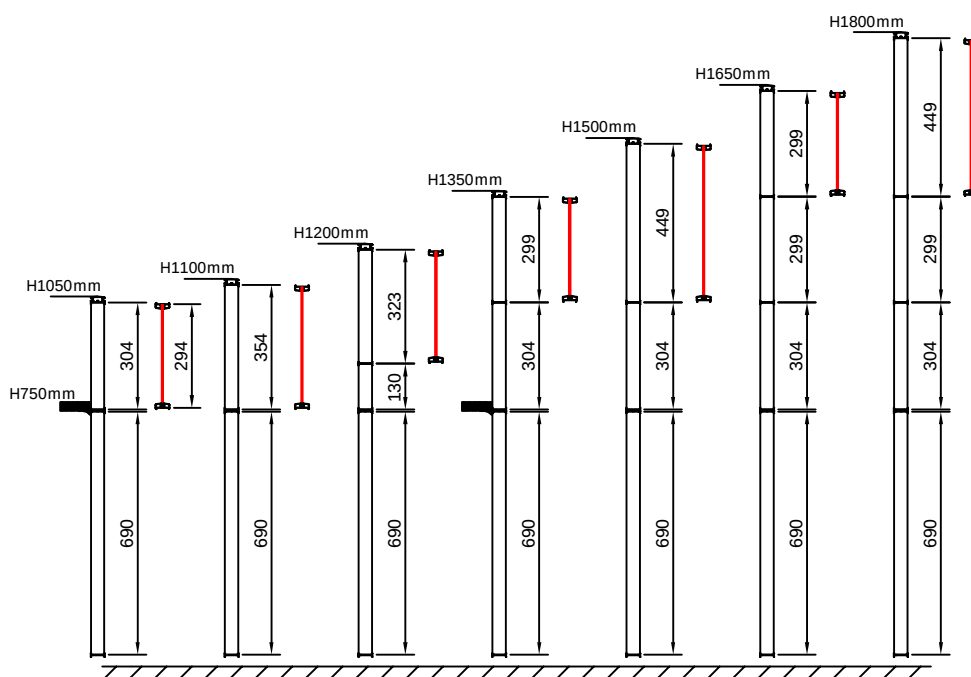


II.all-purpose cable channel on bottom

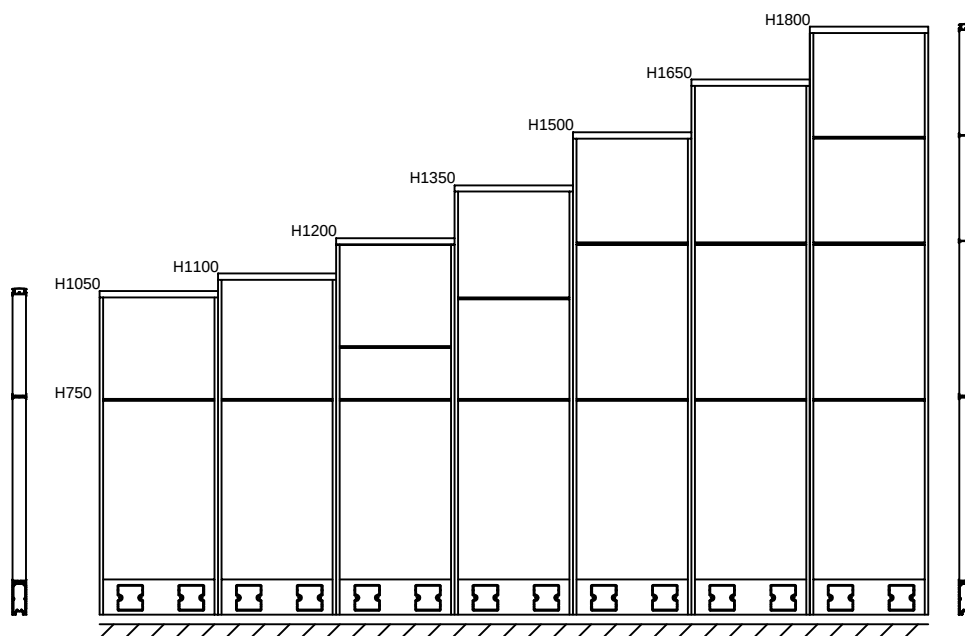


H :1050、1100、1200、1350、1500、1650 and 1800mm.


W: 450、500、600、750、800、900、1050、1200、1400、1500、1600 and 1800mm.

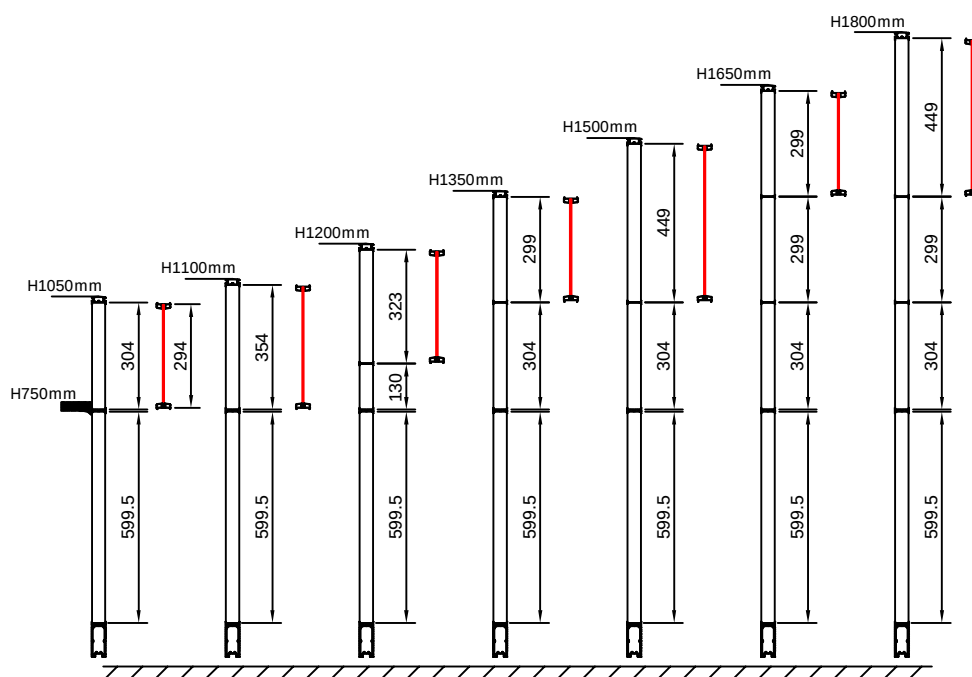


III.T3 cable channel on bottom

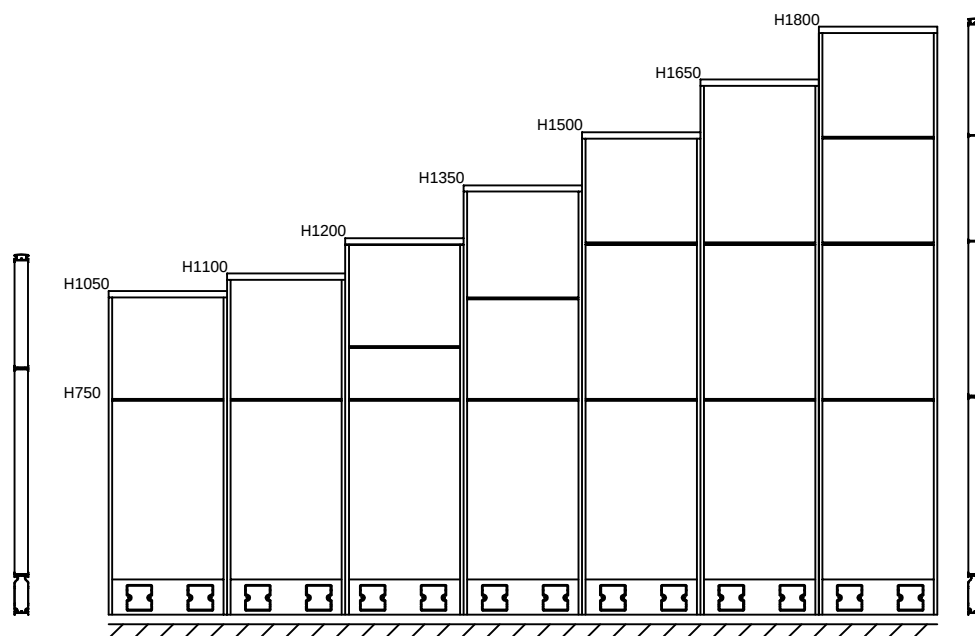

H:1050、1100、1200、1350、1500、1650 and 1800mm.
W: 450、500、600、750、800、900、1050、1200、1400、1500、1600 and 1800mm.

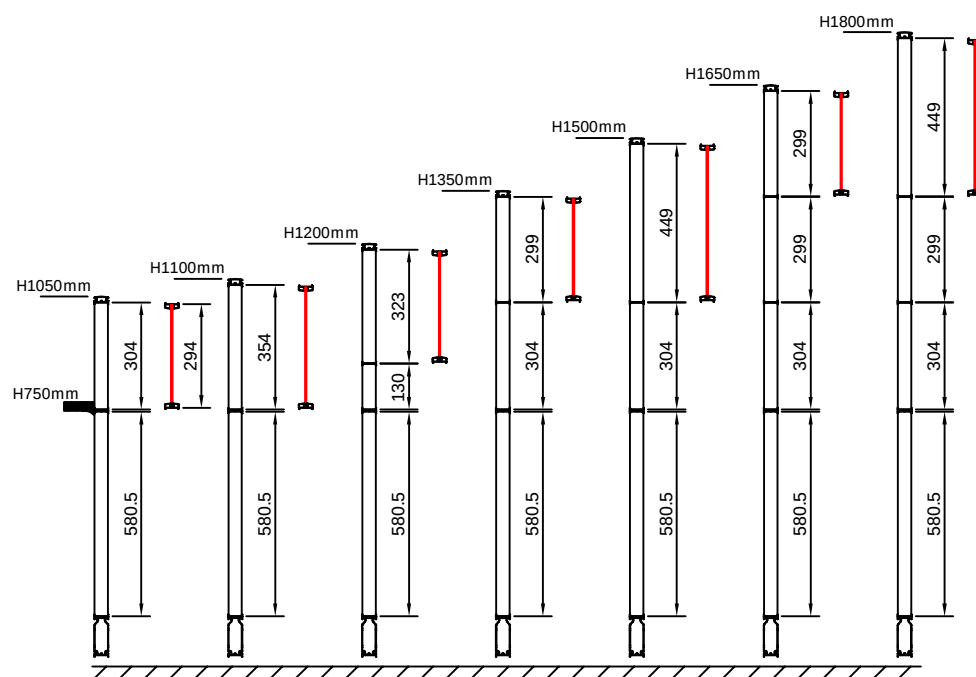


IV.Double T3 cable channel

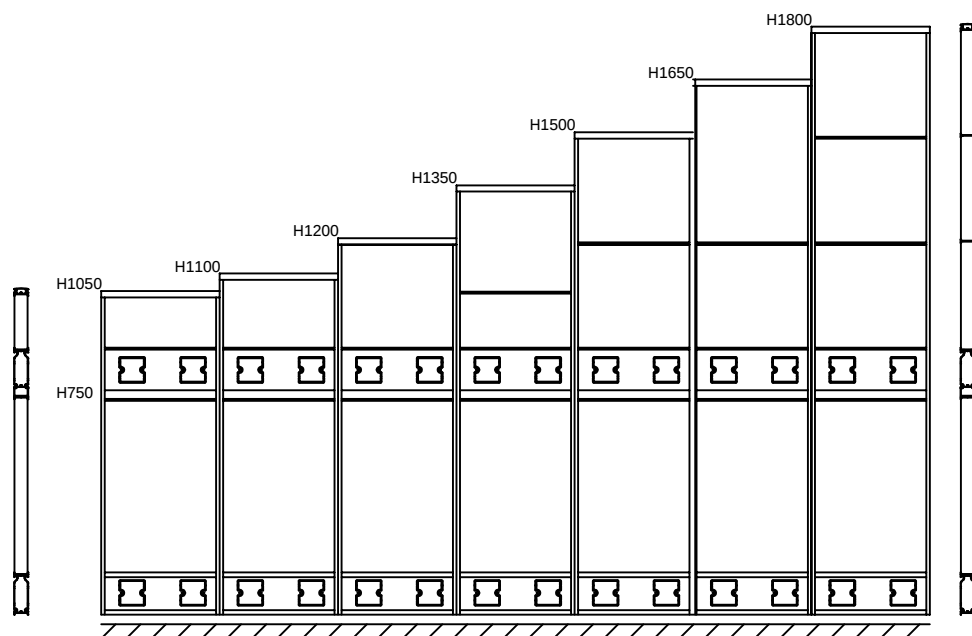


H:1050、1100、1200、1350、1500、1650 and 1800mm.

W: 450、500、600、750、800、900、1050、1200、1400、1500、1600 and 1800mm.

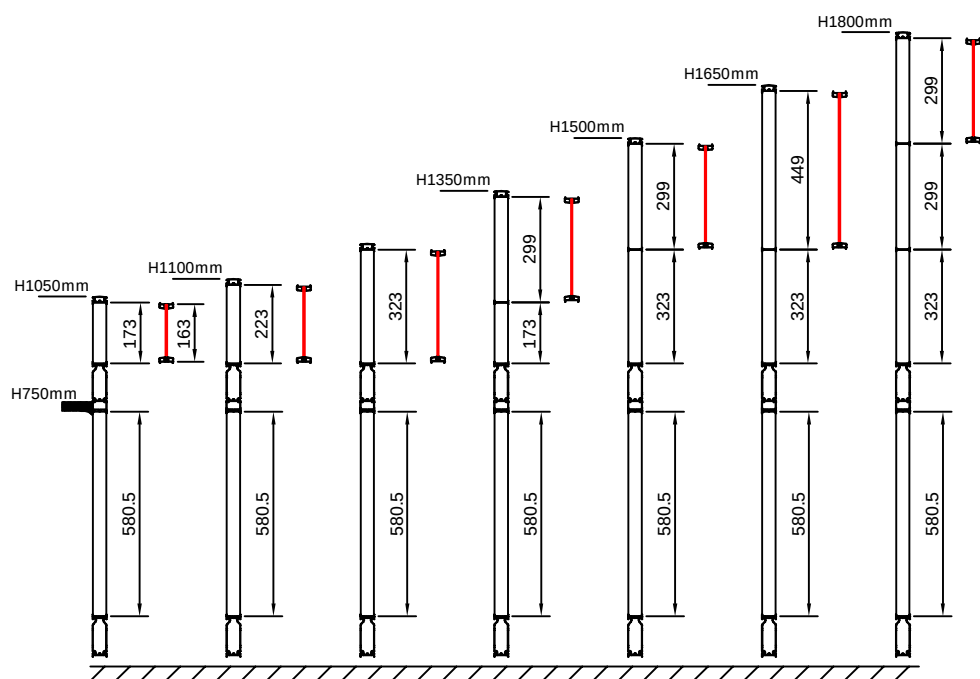


V.T3 cable channel in the mid and All-purpose
cabel channel on the bottom

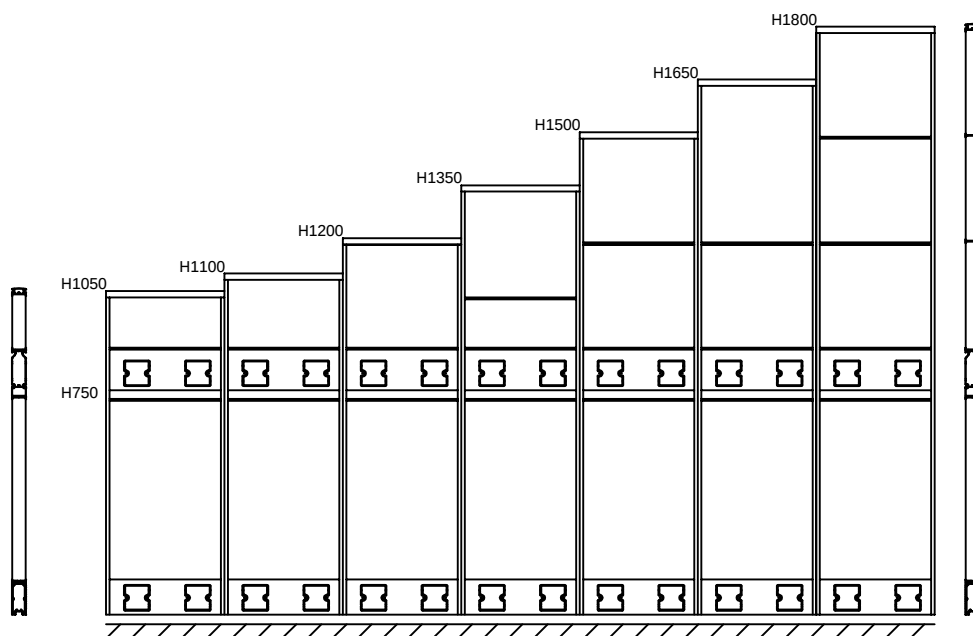


H: 1050、1100、1200、1350、1500、1650 and 1800mm.

W: 450、500、600、750、800、900、1050、1200、1400、1500、1600 and 1800mm.







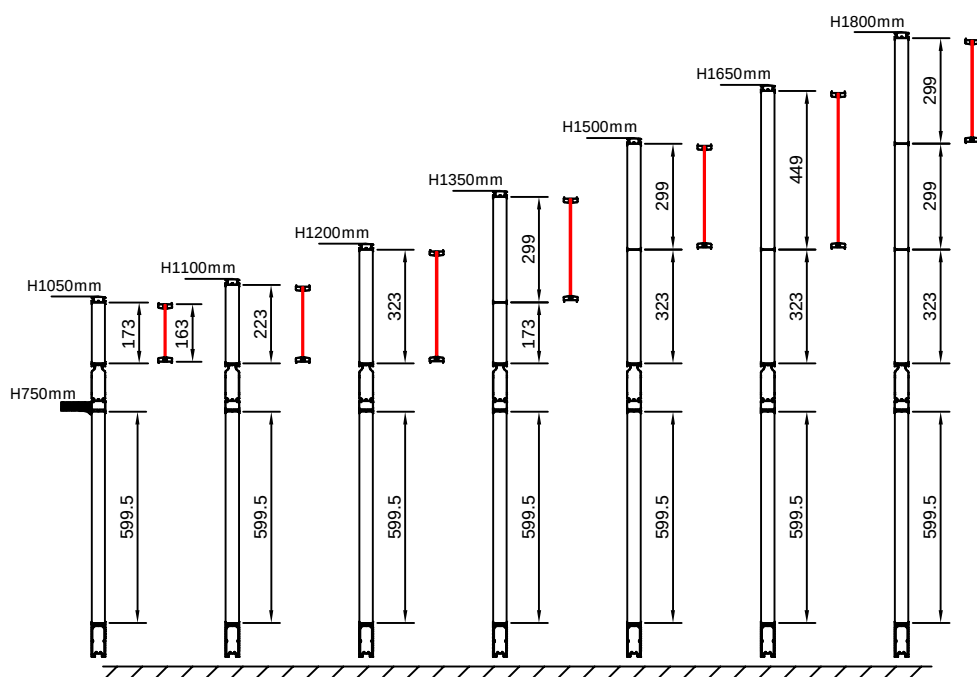






Cut length logics

I.Formula (C32)

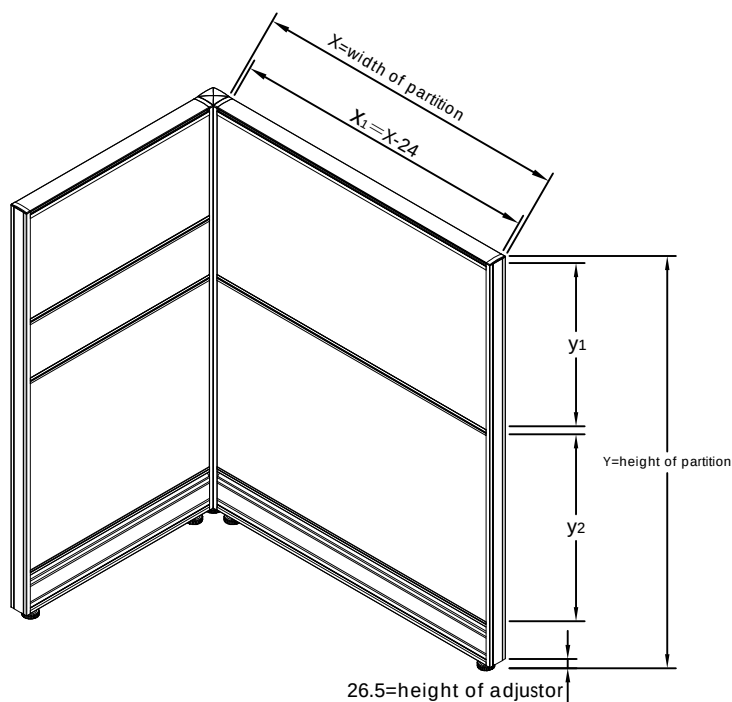


unit: mm

Name	Code	Size	Diagram
top cover	1.1.C32.DFB.01	X-24	
top bar	1.1.C32.DG.01	X-24	
mid bar A	1.1.C32.FGZG.01	X-24	
mid bar B	1.1.H30.GCZG.01	X-24	
cable bar(up)	1.1.T3.XCSG.01	X-24	
cable bar (down)	1.1.C32.XCXG.01	X-24	
cable hook holder	1.1.C32.TYXCGJGT.01	X-44	
big mid bar	1.1.C32.DXCZG.01	X-24	
cable channel	1.1.320.XCB.01	X-24	
cable channel	1.1.T3.XCB.01	X-25	
Top Cover Power Coating	1.1.C32.DFBPF.01	X-24	


Name	Code	Size	Diagram
A pole	1.1.C32.AZ.01	Y-31	
side cover	1.1.C32.CFB.01	Y-31	
corner pole	1.1.C32.FZ.01	Y-31	
C50&C30 corner pole	1.1.C50.50+30LJZ.01	Y-26	
Single Glass Groove Anodized	1.1.C32.XDBLC.01	Y1-10	
Double Glass Groove Anodized	1.1.C32.XSBLC.01	X-24	
75accessories rail	1.1.T3.75GCB.01	X-15	
Single Glass Groove Power Coating	1.1.C32.XDBLCPF.01	Y1-10	
Double Glass Groove Power Coating	1.1.C32.XSBLCPF.01	X-24	

Cut length logics


II. Formula

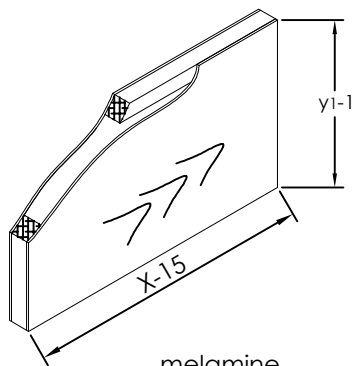


melamine

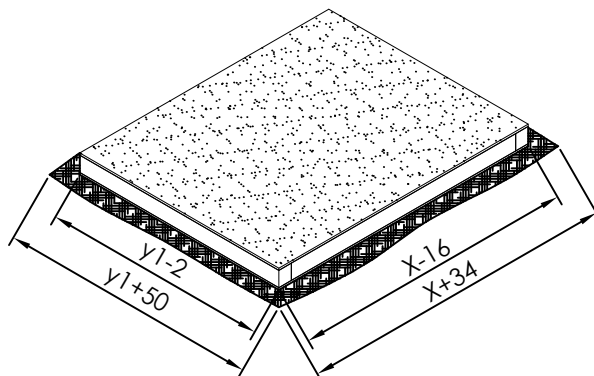

board with fabric

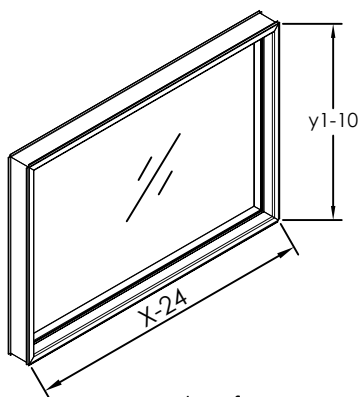


glass frame

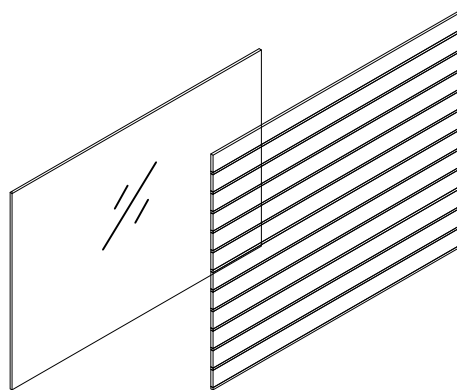


glass

polycarbonate

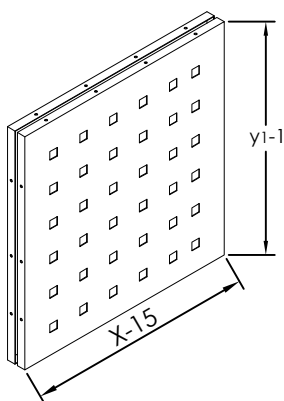


Metal block(except C20)

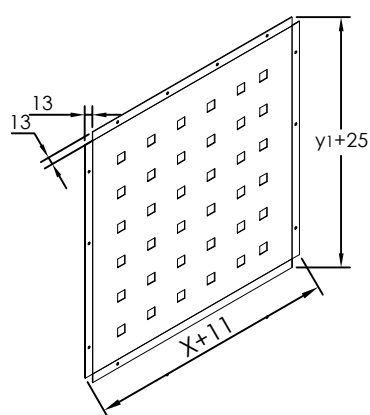

Metal sheet(before bent)


III. Block thickness C32=29.6mm



C32 A pole



Holes punching

Hole punching mould (C32 and C40 common use)

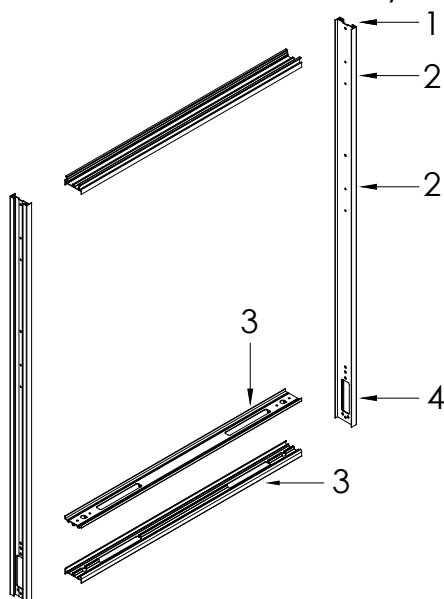

1:A pole connecting with top bar hole


2:Mould for panel connector&top bar holes on A pole

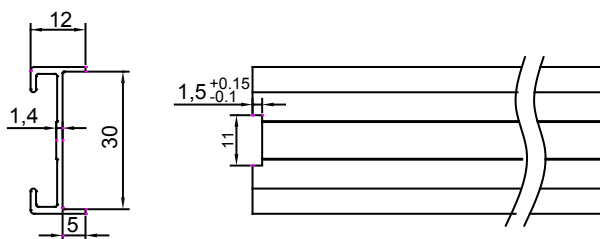


C32 A pole

3:Mould for wire&adjustor holes on cable bar(down)

4:Mould for wire to T3 cable channel holes on A pole

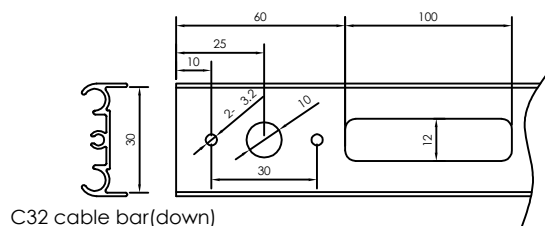

C32 cable bar(down)

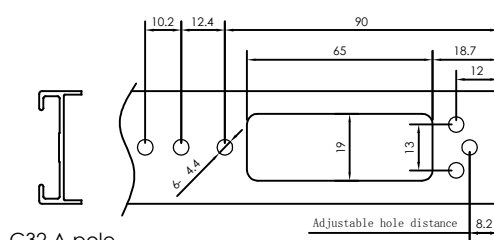

C32 A pole

5、Cable channel fit adjustable foot hole

